

Moving Sigma and Sigma Lite to L1 Legacy mode

What is L1 Legacy

- * Sigma and Sigma Lite readers in L1 Legacy mode have the functionality to be used with Secure Admin software
- * *Secure Admin 4.1.20.01 is recommend

Template Supported

- * Sigma Series terminals supports four type of Templates
- * **Pk-Lite** is the default type of Sigma Series
- * **BUR**
- * **TEM**
- * **VUR**

- * ***PkLite Templates can not be transfer into 4G readers**
- * **BUR and TEM can be transfer into Sigma in L1 Legacy mode**

Enrollment

- * When enrolling in Secure Admin with a MSO, (Enrollment device)it will created a PKLite template and be broadcast to Sigma Series Readers in L1 Legacy mode
- * If you had a mixture of 4G's and Sigma in Secure Admin you would require a **MSO for enrollment for the Sigma readers and a 4G reader for enrollment for the 4G readers.
- * **MSO for enrollment with Sigma in L1 Legacy mode if not using TEM or BUR templates

Mix network 4G and Sigma and or Sigma Lite

- * If you had all 4G readers and One or More Sigma Series reader



- * **You would need**
- * *Secure Admin Software
- * One 4G reader for enrollment
- * MSO for enrollment with Sigma in L1 Legacy mode (if not using TEM or BUR templates)
- * *Secure Admin 4.1.20.01 is recommend

Sigma and or Sigma Lite in L1 Legacy

- * If you had all Sigma Series readers and using Secure Admin



- * **You would need**
- * *Secure Admin Software
- * Sigma in L1 Legacy mode
- * MSO for enrollment
- * *Secure Admin 4.1.20.01 is recommend

Sigma to L1 Legacy mode



How to change Sigma to L1 Legacy

* **Access Path** > Click on the Lock



How to change Sigma to L1 Legacy

* **Access Path**>Password 12345




How to change Sigma to L1 Legacy

* **Access Path** > Click System Menu



How to change Sigma to L1 Legacy

- * **Access Path** > **First Boot Assistant** > **Protocol Configuration**
- * Once you make the change click on the check Mark

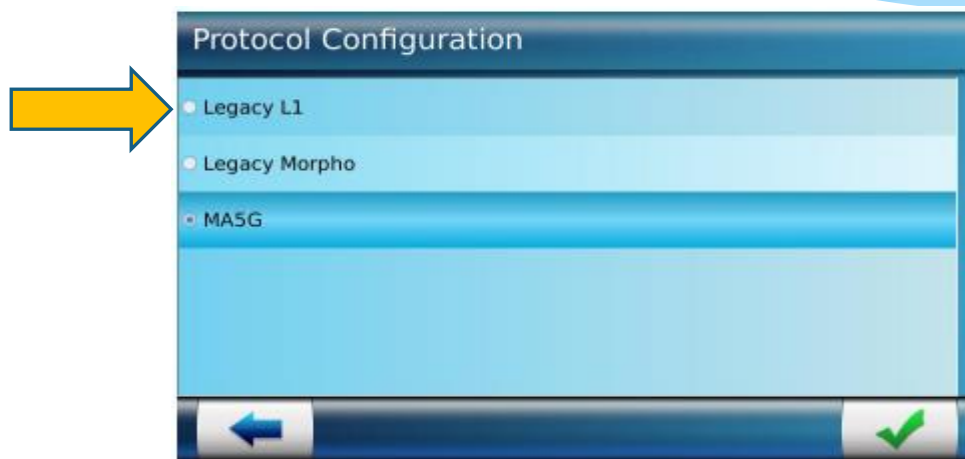

- * Once the protocol selected is saved. The terminal will be required to reboot, in order to use the terminal in any of the legacy modes. When one protocol is switched to another, MorphoAccess® SIGMA Series terminal will erase entire configuration and user database; except communication links and language settings.

Sigma Lite to L1 Legacy mode



How to change Sigma Lite to L1 Legacy

- * Access Path > **USB Script** > **Legacy L1**
- * Visit our website for Change of IP address or L1 configuration
- * <http://service.morphotrak.com/support.html>

Morpho Manager Support With Sigma Lite

How to set IP address on a Sigma Lite

How to set to L1 Legacy Configuration

Easy set up Sigma Lite

- * **NOTE:** When terminal mode is switched from MA5G to any of the legacy modes, the entire configuration and all databases are erased, except communication links. The terminal is rebooted on mode change and factory settings are applicable.

Website

- * Please visit Service@morphotrak.com for software, firmware, videos and PDF's.