


HOW TO USE PRINTED ICLASS CARD ONLY

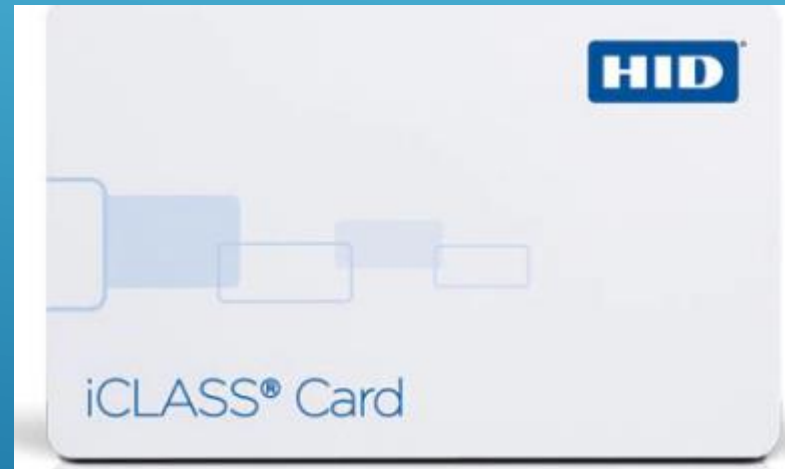

TO WORK WITH SIGMA ICLASS, SIGMA ICLASS LITE, SIGMA ICLASS EXTREME

ACRONYMS

UP=USER POLICY

BDP=BIOMETRIC DEVICE PROFILE

MM=MORPHO MANAGER

ACP=ACCESS CONTROL PANEL

CSN=CARD SERIAL NUMBER

MORPHOMANAGER DEFAULT LOG IN

USERNAME-ADMINISTRATOR

PASSWORD-PASSWORD

ADD AN BIOMETRIC DEVICE

Administration>Biometric Device

Biometric devices from three different hardware families can be added here; the MA 100, MA J, MA 500, and MA VP family, the MA Sigma, MA Sigma Lite And MA Sigma Lite + MA Sigma Extreme, the Morpho 3D Face, the MorphoWave Tower, MorphoWave Compact, and the Morpho Tablet Terminal.

ADD THE DEVICE AS THE EXAMPLE BELOW

- Operator
- Key Policy
- Biometric Device Profile
- Biometric Device**

Enter the details for this Biometric Device

Name:

Description:

Location:

Asset ID:

Export Value:

Time Zone:

Hardware Family:

Serial Number:

Hostname\IP Address:

Port:

Biometric Device Profile:

Include in Time & Attendance Exports:

Change User Onsite / Offsite Status:

Onsite Key:

Offsite Key:



Finish

BIOMETRIC DEVICE PROFILE

Path Administration>Biometric Device Profile

The Biometric Device Profile will define common settings and parameters for one or more biometric devices. This profile can be applied when adding units into the system from the Biometric Device section of Administration

BIOMETRIC DEVICE PROFILE

CREATE OR EDIT THE BIOMETRIC DEVICE PROFILE

Operator

Key Policy

Biometric Device Profile

Biometric Device

Wiegand Profiles

User Policy

Access Schedules

User Distribution Group

User Authentication Mode

Enter details for the Biometric Device Profile

Name:

Description:

Configuration Mode:


Log Retrieval Enabled:

Log retrieval interval: (seconds)

Duplicate check on biometrics: (Does not apply to Morpho 3D Face or MorphoTablet. Only applicable to new user adds or rebuild operations)

MorphoAccess heartbeat interval: (seconds)

Key Policy:



Next



BIOMETRIC DEVICE PROFILE

Biometric Device Settings

General Settings

Wiegand Profile: Standard 26 bit - HID PACS

Language: English

Key Policy: Default

Biometric Threshold Settings

Biometric Threshold: Recommended


MorphoAccess Vein Print Mode: Vein and Fingerprint

MorphoAccess Fingerprint Threshold: 3

Morpho 3D Face Identification Threshold: Medium

Morpho 3D Face Verification Threshold: Low



Next 

WIEGAND PROFILE: USE STANDARD 26 OR 35 BIT HID PACS DEPENDING ON CARD FORMAT OR ANY FORMAT CAN BE CREATED(CREATED FORMAT HAS TO CONTAIN PACS ELEMENTS)

BIOMETRIC DEVICE PROFILE

Multi-Factor Mode Settings

Multi-Factor Mode: ←

Contactless Smart Card Mode: ←

Morpho 3D Face Multi-Factor Mode

Mode:

MA 100, MA J, MA 500, MA VP Multi-Factor Mode

Mode:

MA Sigma, MA Sigma Lite, MA Sigma Lite+, MA Sigma Extreme, MA VP MD and MorphoWave Multi-Factor Modes

Biometric:	<input type="checkbox"/>	Mifare Classic:	<input type="checkbox"/>
Proximity Card:	<input type="checkbox"/>	Mifare DESFire 3DES:	<input type="checkbox"/>
Wiegand In:	<input type="checkbox"/>	Mifare DESFire AES:	<input type="checkbox"/>
Clock and Data In:	<input type="checkbox"/>	Keypad:	<input type="checkbox"/>
HID iClass:	<input checked="" type="checkbox"/>		
HID iClass SEOS:	<input type="checkbox"/>		




Finish



SET THE MULTI-FACTOR MODE SETTINGS AS EXACTLY AS SHOWN

USER AUTHENTICATION MODE



Path Administration>User Authentication Mode

Create new User Authentication Mode

User Authentication Mode(s) will set which authentication triggers will be utilized by users. The parameters are designated here and then a specific User Authentication Mode will be chosen as part of a User Policy. Users added to the system will have their authentication triggers governed by the User Authentication Mode portion of the User Policy they are placed in.

USER AUTHENTICATION MODE

- Operator
- Key Policy
- Biometric Device Profile
- Biometric Device
- Wiegand Profiles
- User Policy
- Access Schedules
- User Distribution Group
- User Authentication Mode**


Enter details for this User Authentication Mode

Name:


Description:

MA 100, MA J, MA 500, and MA VP Mode:

Morpho 3D Face Mode:

 Smartcard encoding will prefer the MA Sigma settings over MA 100, MA J, MA 500, and MA VP mode settings.

CREATE A NEW USER AUTHENTICATION MODE

Next 

USER AUTHENTICATION MODE

MA Sigma, MA Sigma Lite, MA Sigma Lite+, MA Sigma Extreme, MA VP MD, MorphoWave Settings

Mode: ←

Download Identifier To Device: ←

Encode To Smartcard Mode:

Template Location:

Pin Location:

Allow Start By Biometric:

Allow Start By Contactless Card: ←

Allow Start By Keyboard:


Allow Start By Wiegand In:

Require Pin:

Require Template Match:



FOLLOW THIS SETTINGS EXACTLY AS SHOWN



USER POLICY



Path Administration>User Policy

Create new User Policy

Select the User Policy that this user will belong to. This is an important selection, as the policy will determine Biometric Device access and other access control and time & attendance settings.

USER POLICY

CREATE A NEW USER POLICY

Operator

Key Policy

Biometric Device Profile

Biometric Device

Wiegand Profiles

User Policy

Access Schedules

User Distribution Group

User Authentication Mode

Enter the details for this User Policy

Name: Printed Iclass only

Description:

Access Mode: All Biometric Devices and Clients

Allow MA 500 database selection during user enrollment

Access Schedule: 24 hours, 7 days a week

Extended User Details: Display extended user details

Wiegand Profile: Standard 26 bit

User Authentication Mode: Printed Iclass only

Show Photo Capture Page:

Next


**WIEGAND PROFILE USE THE CARD FORMAT
USER AUTHENTICATION MODE IS THE ONE YOU CREATED EARLIER**

USER POLICY

CLICK NONE FOR FINGER BIOMETRICS, UNCHECK SHOW FINGER BIOMETRIC CAPTURE PAGES

Enter the details for finger biometric options

Finger Biometric Enrollment Minimum Fingers:	None	▼
Preferred Finger One:	Left Index Finger	▼
Preferred Finger Two:	Right Index Finger	▼
Preferred Duress Finger:	Left Middle Finger	▼
Vein / Print Mode:	Universal Fast	▼
Show Finger Biometric Capture Pages	<input type="checkbox"/>	

 It is recommended the mode set in User Policy for enrollment should be the same mode or a more restrictive mode than the mode set in Biometric Device Profile. Using a less restrictive mode in User Policy than in Biometric Device Profile is likely to increase the False Rejection Rate (FRR) of biometric devices.



USER POLICY

NONE FOR WAVE ENROLLMENTS

Enter the details for wave biometric options

Wave Enrollment Minimum Hands:

None

Show Wave Biometric Capture Page:

Finish



ENROLLMENT PROCESS

USER MANAGEMENT



User Management

Users are people who will have their biometric data sent to the selected Biometric Device for identification purposes for either access control or time and attendance.

USER MANAGEMENT

CREATE A NEW USER WITH THE USER POLICY CREATED EARLIER

Enter details for this User

User Policy:


Enabled:

First Name:

Middle Name:

Last Name:

Date of Birth: Use M/d/yyyy eg. 3/24/1986.

Next 

USER POLICY: PRINTED ICLASS ONLY


USER MANAGEMENT

MANUALLY TYPE IN THE PRINTED CARD NUMBER

Wiegand Values

User



Finish 

EXTRA

EXTRA

IF YOU WANT TO SEND DIFFERENT FACILITY CODES FROM THE CARDS

WHAT IS REQUIRE IS THE SIGMA ,SIGMA EXTREME, SIGMA LITE READERS TO
HAVE FIRMWARE 4.6.0 OR HIGHER SEE LAST PAGE FOR FIRMWARE LINK
THIS WILL ALSO WORK WITH THE MWC 1.4.0 OR HIGHER

EDIT THE BDP AND CLICK NEXT UNTIL YOU GET TO CUSTOM PARAMETERS

The screenshot shows a software interface with a left-hand navigation menu and a main content area. In the navigation menu, the 'Biometric Device Profile' option is highlighted, and a large blue arrow points down to it. In the main content area, the title bar reads 'MA Sigma, MA Sigma Lite, MA Sigma Lite+, MA Sigma Extreme, MA VP MD,'. Below this, a dark grey header bar contains the text 'Custom Parameters', with a blue arrow pointing to it. Underneath the header bar, there are three buttons: 'Add', 'Edit', and 'Delete'. Below the buttons is a table with a single header row labeled 'Name' and an empty body.

Name

EXTRA

ADD THIS PARAMETER

wiegand.site_code_propagation VALUE 1

Custom Parameters

Add Edit Delete

Name	Value
wiegand.site_code_propagation	1



Finish

FINAL RESOLUTION

ONE USER POLICY NEED TO BE CREATED FOR ICLASS PRINTED CARD NUMBER WITH A USER AUTHENTICATION MODE

BIOMETRIC DEVICE PROFILE NEEDS TO BE CONFIGURED WITH THE PACS OF THE CARD FORMAT, 26 BIT OR 35 BIT OR CREATE YOUR OWN

IF YOUR ICLASS CARDS FORMAT DOES NOT MATCH THE PRE FORMATS THAT COME WITH MORPHOMANAGER THEN YOU NEED TO KNOW THE FULL STRUCTURE AND CREATED THAT FORMAT

YOU CAN VIEW OTHER WIEGAND FORMATS TO COMPARE

THIS WILL PASS THE ICLASS CARD THAT WAS ADDED

WEBSITE

Please visit our website,
service.morphotrak.com for
software, firmware, videos and
PDF'S